


40V Self-Propelled Wheelbarrow

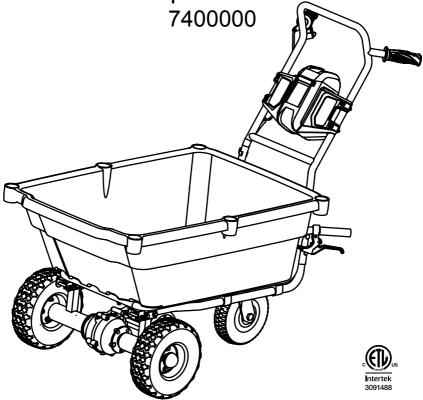

Owner's Manual

TOLL-FREE HELPLINE: 1-888-90WORKS (888.909.6757)

www.GreenWorksTools.com



A Read all safety rules and instructions carefully before operating this tool.

CONTENTS

Contents	2
Product specifications	2
Safety information	3
Symbols	7
Know your wheelbarrow	9
Assembly	10
Operation	
Maintenance	20
Troubleshooting	22
Warranty	23
Exploded View	25
Parts List	26
PRODUCT SPECIFICA	TIONS
40V SELF-PROPELLED WHEELBA	ARROW
· ·	40V 300W
	220 lbs (100kg) on level cement surfaces
	30PSI Maximum
3 · ,	70.6 lbs
' ' '	
_	52.6" (133.6cm)
Height	24.8" (63cm)
•	
Battery	
BatteryFront Tire	
BatteryFront TireRear Tire	
Battery Front Tire Rear Tire Charge time (with 4Ah battery)	
Battery Front Tire Rear Tire Charge time (with 4Ah battery)	

READ ALL INSTRUCTIONS **GENERAL SAFETY RULES**

🕰 W A R N I N G

When using electric gardening appliances, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following.

- Read, understand, and follow all instructions on your wheelbarrow's label and in this guide. Be thoroughly familiar with the controls and the proper use of your wheelbarrow before starting.
- Only allow responsible individuals who have a thorough understanding of these instructions to operate your wheelbarrow. Never allow children to operate your wheelbarrow.
- · Use extra care when approaching blind corners, shrubs, trees, or other objects that may obscure your vision.
- · Wear shoes with non-slip treads. If you have safety shoes, wear them. Do not use your wheelbarrow while barefoot or wearing open sandals.
- If you are ever unsure about an action you are about to take, please don't do it.
- Thoroughly inspect the area where your wheelbarrow is to be used, and remove all stones, sticks, wire, pet supplies or lawn toys, and any other foreign objects that you could run over. Also note the location of holes, ruts, bumps, stumps, and other possible hazards.
- · Use your wheelbarrow only in daylight or in an area well lit by artificial light.
- Keep a firm hold on the handle, and walk never run.
- Do not put your hands or feet near or under the rotating wheels.
- Never operate your wheelbarrow in the rain or in tall wet grass. Remember, this is an electric wheelbarrow.
- · Do not move in reverse unless absolutely necessary. When maneuvering in reverse, use extreme caution. Always look down and behind you before moving backwards.
- Do not operate your wheelbarrow if it does not start or stop normally.
- Stay alert and watch what you are doing.
- · Always be sure of your footing.
- · Do not operate your wheelbarrow when you are tired or under the influence of drugs or alcohol.
- Do not use your wheelbarrow for any job other than those for which it is intended.
- Use only manufacturer-recommended replacement parts and accessories.
- · Do not modify your wheelbarrow in any way. Modifications void your warranty.
- · When operating over uneven terrain and slopes, use extreme caution to ensure solid and firm footing.
- Do not pull your wheelbarrow backwards while running in forward gear. This can damage the motor and ruin the gears.
- Prevent damage to the motor and gears do not tow anything behind your wheelbarrow or overload it.

- · Evenly disperse the load in your wheelbarrow's bucket.
- · Use caution when travelling on slopes.

A WARNING

Do not operate the wheelbarrow on the road.

- Do not operate across steep slopes; always travel up and down slopes.
- Do not use on slopes over 15 degrees.
- Park on level surfaces for stability when loading or unloading.
- Weight limit: 220 lbs (100kg) on level cement surfaces overloading may cause injury and could permanently damage unit.
- Only load with as much weight as you can control when machine is moving.
- Never carry passengers.
- · Use only Greenworks batteries.
- Do not use if forward/backward button or power switch or safety button is not working properly.
- Use caution when operating in wet conditions.
- Do not operate in explosive atmospheres such as in the presence of flammable liquids, gasses or flammable dust. If in doubt, wait for dust to settle before using.
- Be sure the area is clear of other people before moving. Do not allow children, bystanders, or pets in your work area when your wheelbarrow is being moved.
- Do not charge appliance in rain, or in wet locations.
- Do not use battery-operated appliance in rain.
- Remove or disconnect battery before servicing, cleaning or removing material from the gardening appliance.
- Use only the following type and size battery(ies): 29662/40V 4Ah Lithium-ion battery.
- Do not dispose of the battery(ies) in a fire. The cell may explode. Check with local codes for possible special disposal instructions.
- Do not open or mutilate the battery(ies). Released electrolyte is corrosive and may cause damage to the eyes or skin. It may be toxic if swallowed.
- Exercise care in handling batteries in order not to short the battery with conducting materials such as rings, bracelets, and keys. The battery or conductor may overheat and cause burns.
- Dress Properly Do not wear loose clothing or jewelry. They can be caught in moving parts.
 Use of rubber gloves and substantial footwear is recommended when working outdoors. Wear protective hair covering to contain long hair.
- · Use Safety Glasses Always use face or dust mask if operation is dusty.
- Don't Force Appliance It will do the job better and with less likelihood of a risk of injury at the rate for which it was designed.
- Store Idle Appliance Indoors When not in use, appliances should be stored indoors in dry, and high or locked-up place out of reach of children.

 Check Damaged Parts - Before further use of the appliance, a guard or other part that is damaged should be carefully checked to determine that it will operate properly and perform its intended function. Check for alignment of moving parts, binding of moving parts, breakage of parts, mounting, and any other condition that may affect its operation. A guard or other part that is damaged should be properly repaired or replaced by an authorized service center unless indicated elsewhere in this manual.



🛕 W A R N I N G

Never stand in the bucket to activate the Wheelbarrow.

MOVING ON SLOPES



🕰 WARNING

Slopes are a major factor related to slip-and-fall accidents, which can result in severe injury. All slopes require caution. If you feel uneasy on a slope, do not drive on it.

- Use caution on slopes. Whenever possible, move up and down the slope at an angle.
- · Exercise caution when changing directions on slopes.
- · Remove obstacles such as rocks, tree limbs, or any other potential object that your Wheelbarrow could hit.
- · Watch for holes, ruts, or bumps. Be careful on uneven terrain to avoid overturning your Wheelbarrow. Tall grass can hide obstacles.
- · When moving down slopes, always keep your Wheelbarrow in low gear and moving. The friction of the motor helps you keep better control of your Wheelbarrow.
- · Use caution when carrying heavy loads up slopes. If your Wheelbarrow is overloaded, the safety fuse may trip and allow the Wheelbarrow to rollback toward you, which may cause severe injury.
- · Do not turn on slopes unless necessary, and then, turn slowly and gradually.
- Do not move near drop-offs, ditches, or embankments. The Wheelbarrow could suddenly turnover if a wheel is over the edge of a cliff or ditch or if an edge caves in.
- Do not park your Wheelbarrow on hills or steep slopes.

CHII DREN



🕰 WARNING

This is not a toy. Children under 14 years of age are not allowed to operate it.

 Tragic accidents can occur if the operator is not aware of the presence of children. Keep children out of the work area and under the watchful care of a responsible adult. Stay alert, and turn the Wheelbarrow off if a child enters the work area. Look behind and down for small children before and while driving backwards. Use extreme care when approaching blind corners, doorways, shrubs, trees, or other objects that may obscure your view of a child who may run into the work area.

• Do not allow children under the age of 14 to operate this Wheelbarrow. Children who are 14 years of age and older must read and understand the operating instructions and safety rules in this manual, and must be trained and supervised by a parent.

SERVICE



A WARNING

Altering the electrical system could cause a fire resulting in serious injury. Don't do it.

- Using components other than those supplied could cause overheating, fire, or explosion.
- Never make adjustments or repairs with the motor running.
- Keep all nuts and bolts tight, and keep the equipment in good condition.
- Keep your Wheelbarrow's wheels free of grass, leaves, or other debris build-up.
- · Keep your Wheelbarrow clean and dry. Use a damp cloth or sponge with a mild soap or detergent when cleaning your Wheelbarrow. Never use gasoline, solvents, or other petroleumbased or solvent-based products when cleaning.
- When not in use, store your Wheelbarrow indoors in a dry place

SYMBOLS

Some of the following symbols may be used on this product. Please study them and learn their meaning. Proper interpretation of these symbols will allow you to operate the product better and safer.

SYMBOL	DESIGNATION/EXPLANATION
V	Voltage
Α	Current
W	Power
min	Time
~	Type of current
	Type or a characteristic of current
⊗	To reduce the risk of injury user must read and understand operator's manual before using this product.
A	Precautions that involve your safety.
	Do not operate on inclines greater than 15°.
	Do not expose machine to rain or wet conditions.
	Pay attention that bystanders are not injured through foreign objects thrown from the wheelbarrow.
	Wear eye protection with side shields that are marked to comply with ANSIZ87.1 when operating this equipment.

SERVICE

Servicing requires extreme care and knowledge and should be performed only by a qualified service technician. For service we suggest you return the product to your nearest **AUTHORIZED SERVICE CENTER** for repair. When servicing, use only identical replacement parts.

SYMBOLS

The following signal words and meanings are intended to explain the levels of risk associated with this product.


SYMBOL	SIGNAL	MEANING
lack	DANGER	Indicates an imminently hazardous situation, which, if not avoided, will result in death or serious injury.
A	WARNING	Indicates a potentially hazardous situation, which, if not avoided, could result in death or serious injury.
A	CAUTION	Indicates a potentially hazardous situation, which, if not avoided, may result in minor or moderate injury.
	CAUTION	(Without Safety Alert Symbol) Indicates a situation that may result in property damage.

WARNING

To avoid serious personal injury, do not attempt to use this product until you have read this Owner's Manual thoroughly and understand it completely. If you do not understand the warnings and instructions in this Owner's Manual, do not use this product. Call the Toll-free Helpline (1-888-909-6757) or www.greenworkstools.com for assistance.

KNOW YOUR WHEELBARROW

Read this operator's manual and safety rules before operating your self-propelled wheelbarrow. Compare the illustration in Figure 1 to your wheelbarrow in order to familiarize yourself with the location of various controls and adjustments. Save this manual for future reference.

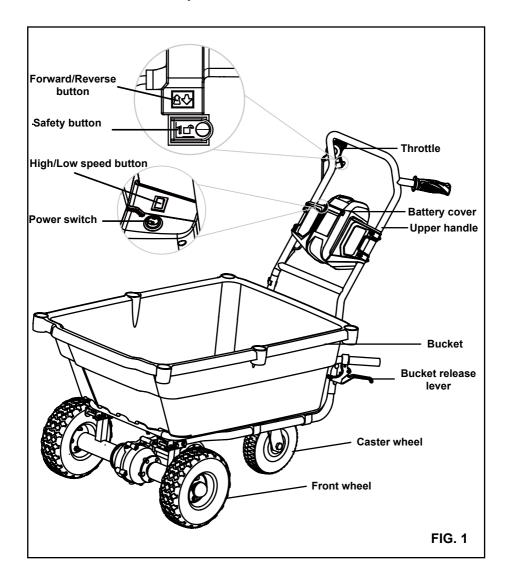

ASSEMBLY INSTRUCTIONS

UNPACKING

- · Carefully remove the product and any accessories from the box. Make sure that all items listed in the packing list are included.
- Inspect the product carefully to make sure no breakage or damage occurred during shipping.
- Do not discard the packing material until you have carefully inspected and satisfactorily operated the product.
- If any parts are damaged or missing, please call 1-888-909-6757 for assistance.



🛕 W A R N I N G

Do not use this product if any parts on the packing list are already assembled to your product when you unpack it. Parts on this list are not assembled to the product by the manufacturer and require customer installation. Use of a product that may have been improperly assembled could result in serious personal injury.

PACKING LIST

Self propelled wheelbarrow



Handle assembly



· Battery and charger





· Knobs and U-bolts









Manual



WARNING

If any parts are damaged or missing, do not operate this product until the parts are replaced. Using a product with damaged or missing parts could result in serious personal injury.

ASSEMBLY INSTRUCTIONS

🛕 W A R N I N G


Do not attempt to modify this product or create accessories not recommended for use with this product. Any such alteration or modification is misuse and could result in a hazardous condition leading to possible serious personal injury.


A WARNING

Never operate the wheelbarrow without the proper safety devices in place and working. Never operate the wheelbarrow with damaged safety devices. Operation of this product with damaged or missing parts could result in serious personal injury.

ATTACH THE UPPER HANDLE (See Figure 2)

- · Slide the upper handle over the lower handle tubes on the bucket assembly. Make sure the bolt holes align.
- Insert a U-bolt from the outside of the handle, passing through the bolt hole where the upper and lower handles attach
- Once the U-bolt is completely through the handle assembly, tighten the knob securely.
- · Attach the other side of the handle the same way.





🛕 W A R N I N G


You are responsible for controlling and steering the wheelbarrow once it is moving. Grasp the handle securely before moving. Make sure you are ready to move with the wheelbarrow before pressing the on-off button and safety button. Keep a firm grip on the handle once you are moving.

LOADING YOUR WHEELBARROW


Load your Wheelbarrow carefully; disperse the load evenly across the bucket. The bucket can take up to 220 pounds (100 kilograms). When moving up and down hills, limit your load to no more than 220 pounds (100 kilograms). If you think you are carrying too much, remove some material from your Wheelbarrow.

TO INSTALL BATTERY PACK (See Figure 3)

Open the battery cover.





3. Ensure the battery pack is secured in place in the battery compartment.



2. Align the raised rib inside the panel with

4. Close the battery cover.





A WARNING


When placing battery pack in the tool, be sure raised rib on battery pack aligns with the groove inside the tool and latches into place properly. Improper installation of the battery pack can cause damage to internal components.

TO REMOVE BATTERY PACK

- Depress the latch on the back of the battery pack to release the battery.
- · Remove the battery pack.

LOCK/UNLOCK THE BRAKE (See Figure 4)

- Step on the brake, the brake will be locked, and the Wheelbarrow will stop.
- Step on the brake again, the brake will be unlocked.

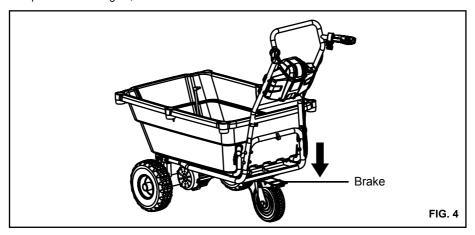

STARTING


• To utilize your Wheelbarrow set the power switch to the on position

🛕 W A R N I N G


If you do not engage the throttle in 4 seconds after pressing the safety button, you have to press the safety button again.

MOVING FORWARD/REVERSE (See Figure 5)


Select forward/reverse.




3. Push safety button. (There is a 4-seconds lead time to engage step 4.) If the throttle is not engaged within 4 seconds, the unit will not start and safety button needs to



2. Select high/low speed.



4. Engage the throttle to start the wheelbarrow.



Move in reverse only for short distances. If you have a long distance to travel, turn your Wheelbarrow around and go forward.


A WARNING

When moving in reverse, be ready for the wheelbarrow to lurch towards you and get immediately up to speed. Be careful; step back and be prepared to walk backwards. Consider standing to the side of the wheelbarrow until you get used to moving backwards.

STOPPING (See Figure 6)


- 1 Release the throttle
- 2. Press the power switch to the off position. Remove the battery and store in a safe place to prohibit unauthorized use of the Wheelbarrow.

NOTE: The self-propelled wheelbarrow does not have a braking system. Instead, to stop your wheelbarrow, you simply release the throttle. Because of its momentum, your wheelbarrow might continue to move a bit after you release the throttle. Don't let go of the handle until your wheelbarrow stops completely. Park your wheelbarrow in a level area so it doesn't roll away.

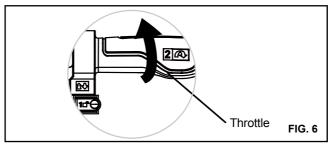


UNLOADING YOUR WHEELBARROW (See Figure 7)

- 1. Stop the wheelbarrow.
- 2. Squeeze the release lever on the bucket to release the bucket.
- 3. Grasp the handles on the bucket to raise and unload the bucket.

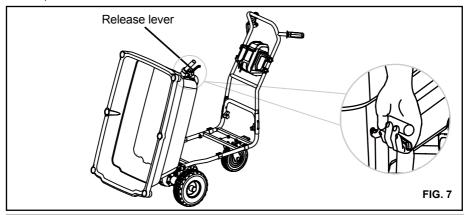

CHECKING BATTERY CAPACITY

Press the battery capacity indicator (BCI) button. The lights will illuminate according to the batteries capacity level. See chart below:

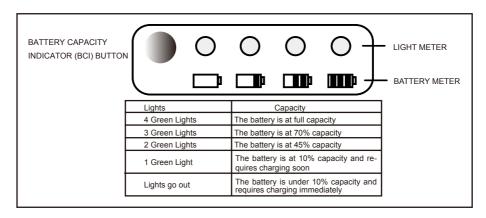

SAFETY NOTES AND PRECAUTIONS

- 1. Do not disassemble the battery.
- 2. Keep away from the children.
- 3. Do not expose the battery to water or salt water, battery should be stored in a cool and dry location.
- 4. Do not place the battery in high-temperature locations, such as near a fire, heater, etc.
- 5. Do not reverse the positive terminal and the negative terminal of the battery.
- 6. Do not connect the positive terminal and the negative terminal of the battery to each other with any metal objects.
- 7. Do not knock, strike or step on the battery.
- 8. Do not solder directly onto the battery and pierce the battery with nails or other edge tools.
- 9. In the event that the battery leaks and the fluid gets into one's eye, do not rub the eye. Rinse well with water. Immediately discontinue use of the battery, if, while using the battery emits an unusual smell, feels hot, changes color, changes shape, or appears abnormal in any other way.

A WARNING

To avoid risk of fire, electric shock, or electrocution:

- Do not use a damp cloth or detergent on the battery or battery charger.
- Always remove the battery pack before cleaning, inspecting, or performing any maintenance on the tool.

CLEANING

1. Wipe the outside of the charger with a dry, soft cloth. Do not hose down or wash with water.

CAUTION

Do not use strong solvents or detergents on the plastic housing or plastic components. Certain household cleaners may cause damage and may also cause a shock hazard.

ENVIRONMENTALLY SAFE BATTERY DISPOSAL



The following toxic and corrosive materials are in the batteries used in this tool battery pack: Li-ion, a toxic material.

A WARNING

All toxic materials must be disposed of in a specified manner to prevent contamination of the environment. Before disposing of damaged or worn out Lithium-i on battery packs, contact your local waste disposal agency, or the local Environmental Protection Agency for information and specific instructions. Take the batteries to a local recycling and/or disposal centre, certified for Li-ion disposal.

A WARNING

If the battery pack cracks or breaks, with or without leaks, do not recharge it and do not use. Dispose of it and replace with a new battery pack. DO NOT ATTEMPT TO REPAIR IT! To avoid injury and risk of fire, explosion, or electric shock, and to avoid damage to the environment:


- Cover the battery's terminals with heavy-duty adhesive tape.
- DO NOT attempt to remove or destroy any of the battery packomponents.
- DO NOT attempt to open the battery pack.
- If a leak develops, the released electrolytes are corrosive and toxic. DO NOT get the solution in the eyes or on skin, and do not swallow it.
- DO NOT place these batteries in your regular household trash.
- DO NOT incinerate.
- DO NOT place them where they will become part of any waste landfill or municipal solid waste stream.
- Take them to a certified recycling or disposal centre.

CHARGING PROCEDURE

NOTE: The battery is not shipped fully charged. It is recommended to fully charge before first use to ensure that maximum run time can be achieved. This lithium-ion battery will not develop a memory and may be charged at any time.

- 1. Plug the charger into an AC power outlet.
- 2. Insert the battery pack (1) into the charger (2).

This is a diagnostic charger. The Charger LED Lights (3) will illuminate in specific order to communicate the current battery status. They are as follows:

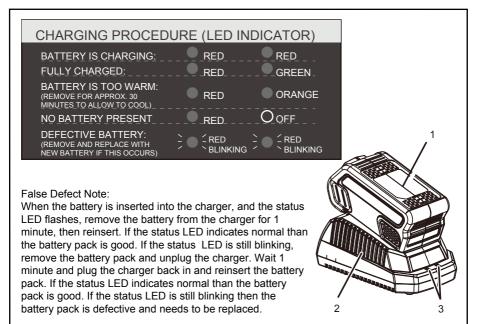

CHECKING THE CHARGE

If the battery pack does not charge properly:


- Check the current at the power outlet with another tool. Make sure that the outlet is not turned off.
- Check that the charger contacts have not been shorted by debris or foreign material.
- If the surrounding air temperature is not normal room temperature, move the charger and battery pack to a location where the temperature is between 45 °F and 104°F.

A WARNING

If the battery is inserted into the charger when warm or hot, the CHARGING LED indicator light on the charger may switch on and illuminate ORANGE. If this occurs allow the battery to cool outside of the charger from approximately 30 minutes.

CHARGER MOUNTING

- 1. This charger can be installed hanging on a wall using two screws (not supplied)
- 2. Locate the placement for the charger to be wall mounted.
- 3. If fastening to wood studs use 2 wood screws.
- 4. Drill two holes 2 3/8" (6 cm) on center ensuring they are level.
- 5. If fastening to drywall use wall anchors and screws to secure the charger to the wall.

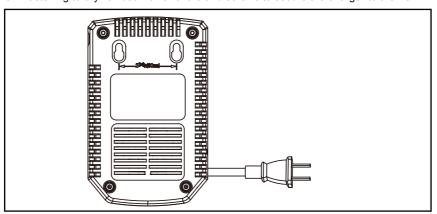

NOTE: If the battery and the charger won't be used for a long time, please remove the battery from the charger and pull out the AC power plug.

MAINTENANCE

Like any machine, maintaining your Wheelbarrow ensures its best performance and extends its life. Follow these procedures to keep your Wheelbarrow working at peak efficiency.

- Check all screws and nuts regularly; tighten them as needed. Regularly check the plastic parts for cracks or broken pieces.
- Periodically check the tire pressure on all three tires. Keep the tire pressure between 28 and 30 pounds per square inch (psi). The Wheelbarrow's tire valves work like those on bicycle tires. To add air, remove the cap and push the air hose or pump fitting onto the end of the valve stem. To remove air, depress the pin in the center of the valve stem.

A WARNING

Never over inflate the tires. If you over inflate the tires, you could cause them to explode resulting in severe injury.

- Try not to use your Wheelbarrow when it's wet or snowy. And do not spray the electrical areas
 of your Wheelbarrow with a hose. Water and moisture in the motors and electrical switches
 can cause them to corrode, which then causes them to fail. Remember, this is an electrical
 machine!
- That said; you can still hose off your Wheelbarrow. Just be careful not to spray water directly
 on the Control Panel or through the battery cover.
- Wash your Wheelbarrow using a mild automotive type detergent and water with a soft brush or rag. Do not use any alkaline-based soaps or pressure wash your Wheelbarrow.

STORING YOUR WHEELBARROW

A WARNING

When you store your Wheelbarrow, follow these important guidelines to help ensure your Wheelbarrow's best performance when you use it again.

- Store your Wheelbarrow inside or under a protective cover.
- Charge the battery before storing your Wheelbarrow. In temperatures lower then 40° F (5° C), the battery maintains a charge for about 60 days. If you store your Wheelbarrow for extended periods of time, periodically recharge the battery. Once a month is a good rule of thumb.
- Always store your Wheelbarrow in an environment where the temperature is between -10° F (-23° C) and +85° F (+23° C). Make sure the storage temperatures will never be outside these limits.
- Store your Wheelbarrow in a dry environment. Water will damage your Wheelbarrow and the battery.
- Do not store your Wheelbarrow near chemicals (such as fertilizers), or organic or other solvents. These products are often highly corrosive and may cause permanent damage to your Wheelbarrow.
- Do not store your Wheelbarrow close to a source of heat, sparks, or open flames.


MAINTENANCE


DRAINING THE OIL (See Figure 8)

- Remove the drain plug with a wrench to drain the oil.
- After the oil is drained, screw the drain plug back in again.

REFILLING THE OIL (See Figure 9)

- Remove the oil plug with a wrench.
- Refill the oil from the oil hole. The oil capacilty is about 150 ml.
- · screw the oil plug back in again.

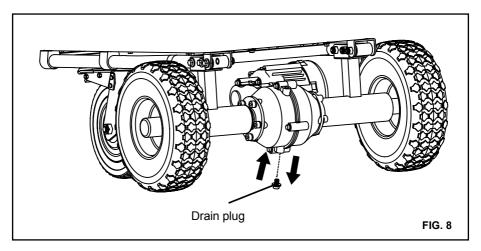

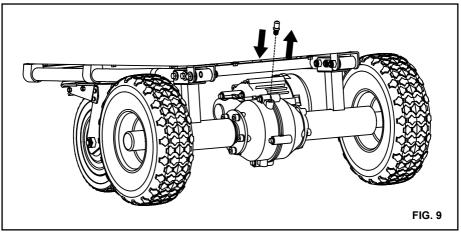

TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSE	SOLUTION
The Wheelbarrow does not run.	Battery is not secure.	To secure the battery pack, make sure the latch on bottom of the battery pack snaps into place.
	Battery is not charged.	Charger the battery pack according to the instructions included with you model
	The wire is loose.	Check all the connectors and to see if any part is loose or not.
	The controller is damaged.	Replace the damaged one with specific controller by strictly following up the instructions.
The Wheelbarrow runs sluggishly.	Battery volume is low.	See the battery indicator to check the volume. Charger the battery pack according to the instructions included with you model
	The battery is old and does not accept full charge.	Replace the battery with a new 40 Volt GreenWorks battery
	The conditions are too stressful for your Wheelbarrow.	The Wheelbarrow is intended for residential use. If slopes are too steep or the terrain too bumpy, your Wheelbarrow might experience a noticeable decrease in performance.
Sometimes the Wheelbarrow runs, but other times it does not.		Contact us at 1-888-909-6757 and we'll help you diagnose and repair
Loud clunking or grinding noise from the gearbox.	The motor's gears are broken.	Contact us at 1-888-909-6757 and we'll help you diagnose and repair the problem.

LIMITED FOUR-YEAR WARRANTY







GREENWORKS™ hereby warranties this product, to the original purchaser with **proof of purchase**, for a period of four (4) years against defects in materials, parts or workmanship. GREENWORKS™, at its own discretion will repair or replace any and all parts found to be defective, through normal use, free of charge to the customer. This warranty is valid only for units which have been used for personal use that have not been hired or rented for industrial/commercial use, and that have been maintained in accordance with the instructions in the owners' manual supplied with the product from new.

ITEMS NOT COVERED BY WARRANTY:

- 1. Any part that has become inoperative due to misuse, commercial use, abuse, neglect, accident, improper maintenance, or alteration;
- The unit, if it has not been operated and/or maintained in accordance with the owner's manual;
- 3. Normal wear, except as noted below;
- 4. Routine maintenance items such as tires, tubes, blade sharpening;
- 5. Normal deterioration of the exterior finish due to use or exposure.

GREENWORKS HELPLINE 1-888-90WORKS:

Warranty service is available by calling our toll-free helpline at 1-888-909-6757.

TRANSPORTATION CHARGES:

Transportation charges for the movement of any power equipment unit or attachment are the responsibility of the purchaser. It is the purchaser's responsibility to pay transportation charges for any part submitted for replacement under this warranty unless such return is requested in writing by GREENWORKS.

CHANGZHOU GLOBE CO.,LTD NO.65(3-4) XingGang Rd, ZhongLou Zone, ChangZhou ,JiangSu China

LIMITED WARRANTY

GREENWORKS™ battery hereby warranties this product, to the original purchaser with proof of purchase, for a period of two (2) years against defects in materials, parts or workmanship.

GREENWORKS™ charger hereby warranties this product, to the original purchaser with proof of purchase, for a period of two (2) years against defects in materials, parts or workmanship.

GREENWORKS™, at its own discretion will repair or replace any and all parts found to be defective, through normal use, free of charge to the customer. This warranty is valid only for units which have been used for personal use that have not been hired or rented for industrial/commercial use, and that have been maintained in accordance with the instructions in the owners' manual supplied with the product from new.

ITEMS NOT COVERED BY WARRANTY:


- Any part that has become inoperative due to misuse, commercial use, abuse, neglect, accident, improper maintenance, or alteration; or
- The unit, if it has not been operated and/or maintained in accordance with the owner's manual; or
- 3. Normal wear, except as noted below;
- 4. Routine maintenance items such as tires, tubes, blade sharpening;
- 5. Normal deterioration of the exterior finish due to use or exposure.

GREENWORKS HELPLINE 1-888-90WORKS:

Warranty service is available by calling our toll-free helpline at 1-888-909-6757.

TRANSPORTATION CHARGES:

Transportation charges for the movement of any power equipment unit or attachment are the responsibility of the purchaser. It is the purchaser's responsibility to pay transportation charges for any part submitted for replacement under this warranty unless such return is requested in writing by GREENWORKS.

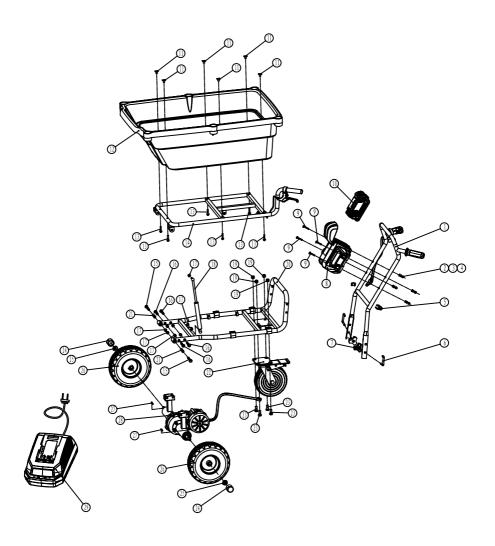

PARTS LIST

ITEM NO.	PART NO.	DESCRIPTION	QTY
1	31916688	Handle assembly	1
2	32206688	Cap nut	4
3	32222688	Flat washer	4
4	32223688	Spring washer	4
5	34135469A	Cable hook	5
6	33204688	U-bolt	2
7	3410835-4	Knob	2
8	31917688	Panel assembly	1
9	32201688	Cross recessed pan head screw ,M6x35	4
10	31102975	Lithium battery pack , 40V 4Ah	1
11	32202688	T shaped nut	6
12	34105688	Bucket	1
13	32220688	Hexagon flange head bolt,M6x30	6
14	31918688	Upper cart frame assembly	1
15	32213688	Hexagon flange head bolt,M8x60	2
16	32204688	Hexagon flange head bolt,M8x50	4
17	32214688	Nylon locked nut ,M8	12
18	31910688	Buffer	1
19	32218688	Nylon locked nut ,M10	4
20	31919688	Lower cart frame assembly	1
21	33202688	Bushing,zinc plate	2
22	31907688	Caster wheel	1
23	32217688	Hexagon flange head bolt,M10x25	4
24	34209688	Axle rubber cover	2
25	32219688	Metalic locked nut ,M14	2
26	31908688	Pneumatic wheel, 10"x3.5"-4"	2
27	32234563	Key, 5x5x30	2
28	31920688	Gear motor assembly	1
29	31102980	Charger, 40V	1



TOLL-FREE HELPLINE: 1-888-90WORKS (888.909.6757)

Rev: 01 (10-31-11)